

43

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 September 2006 (08.09.2006)

PCT

(10) International Publication Number
WO 2006/092797 A2

(51) International Patent Classification: Not classified

(74) Agent: G.E. EHRLICH (1995) LTD.; 11 Menachem Begin Street, 52 521 Ramat Gan (IL).

(21) International Application Number:
PCT/IL2006/000288

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 2 March 2006 (02.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/657,410 2 March 2005 (02.03.2005) US

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): DUNE MEDICAL DEVICES LTD. [IL/IL]; 20 Alon Hatavor Street, Industry Park, 38900 Caesaria (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HASHIMSHONY, Dan [IL/IL]; Simtat Hairit, 37808 Givat Ada (IL). YARDEN, Orit [IL/IL]; 22 Rehavat-ilan, 54056 54056 Givat Shmuel (IL). AHARONOWITZ, Gal [IL/IL]; 7 Hakalanit Street, 44910 Moshav Gan Haim (IL). COHEN, Gil [IL/IL]; 8 Davidson Street, 93706 Jerusalem (IL). GELTNER, Iddo [IL/IL]; 4 El-Al Street, 46588 Herzlia (IL).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEVICE AND METHOD FOR TRANSPORTING AND HANDLING TISSUE

(57) Abstract: A device and method are provided for tissue handling, while maintaining the in-vivo tissue orientation. The device includes a structure, configured for receiving and holding a tissue specimen, wherein the tissue specimen includes tissue positional references; and device positional references, associated with the structure, for fixing the orientation of the tissue specimen, when held by the device, so as to reflect the tissue specimen positional references.



WO 2006/092797 A2

DEVICE AND METHOD FOR TRANSPORTING AND HANDLING TISSUE

FIELD OF THE INVENTION

5 The present invention relates to a device and method for transporting and handling tissue.

BACKGROUND OF THE INVENTION

10 Tissue, being largely water or fat, does not maintain its shape. In consequence, positional reference of a tissue that has been removed, vis a vis its position and orientation in vivo, is nearly impossible. Yet at times, preserving the positional reference is highly desirable. For example, where a biopsy sample is taken, and only a portion of it is found cancerous, the positional reference is necessary, to determine where the cancerous tissue in the body may be. Similarly, where a lump of
15 cancerous tissue is removed, without a margin of healthy tissue around it, i.e., without a "clean margin", thus indicating that some cancerous tissue may have been left in the body, the positional reference is necessary, to correlate the orientation of the removed tissue specimen with the body tissue.

20 Today, any one of two methods may be used for marking the orientation of the removed tissue. The first is known as the suture method. A surgeon marks a lateral edge of the removed tissue specimen with a long suture and a superior edge of the removed tissue specimen with a short suture. Yet, this method is inaccurate, as it is affected by changes in the removed tissue specimen during handling and transportation.

25 The second method is known as inking. The surgeon uses six colors of ink to mark the six faces of the removed tissue specimen. This method is rather demanding and involves much handling of the removed tissue specimen. Handling may be undesirable when the removed tissue specimen is yet to undergo pathological examinations.

30 US Patent 5,913,857, to Ritchart, et al., entitled, "Methods and devices for collection of soft tissue," provides a tissue sampling system for breast biopsies, intraoperative staging, laparoscopic surgery, lymphadenectomy and other procedures.

Similarly, US Patent 6,007,497, to Huitema, entitled, "Surgical biopsy device," describes a biopsy probe for the collection of a soft tissue.

In these devices, the positional reference may be maintained through a rigid connection between a cutting tool and a carrying frame. However, where the tissue is first cut then transported to a carrying frame, the positional reference may be lost.

A device and method for transporting tissue while maintaining its positional reference, in a reliable manner, is desired.

SUMMARY OF THE INVENTION

The present invention overcomes the shortcomings of the presently known configurations by providing a device and method for tissue transport and handling, while maintaining the in-vivo tissue orientation. The device includes a structure, configured for receiving and holding a tissue specimen, wherein the tissue specimen includes tissue positional references; and device positional references, associated with the structure, for fixing the orientation of the tissue specimen, when held by the device, so as to reflect the tissue specimen positional references.

In accordance with one aspect of the present invention, there is thus provided a device for tissue handling, comprising:

a structure, configured for receiving and holding a tissue specimen, wherein the tissue specimen includes tissue positional references; and

device positional references, associated with the structure, for fixing the orientation of the tissue specimen, when held by the device, so as to reflect the tissue specimen positional references.

Additionally, the device is configured to define tissue lateral and superior sides and a tissue top face.

Furthermore, the device is substantially transparent to at least one imaging modality, selected from the group consisting of x-ray imaging gamma imaging, and MRI.

Furthermore, the device is configured to receive the tissue specimen prior to its complete removal.

Additionally, the device positional references are built into the structure of the device.

Additionally, or alternatively, the device positional references are based on a color code.

Additionally, or alternatively, the device positional references are based on sutures of different lengths.

5 Additionally, the device is formed as a rigid body.

 Alternatively, the device is formed as a flexible body.

 Additionally, or alternatively, the device is formed as a stretchable body.

 Additionally, or alternatively, the device is formed as an expansible body.

 Alternatively, the device may be formed as a sac-like mesh.

10 Alternatively, the device may be formed as a stretchable stocking.

 Alternatively, the device may be formed as a resilient cage.

 Alternatively, the device may be formed as a box outline, comprising:

 a box outline body;

 a box outline lid; and

15 at least one holder, for holding together the box outline body and lid.

 Additionally, the structure comprises:

 first and second frames, designed to be superimposed and receive and hold the tissue specimen therebetween; and

20 at least one holder, for holding the first and second frames together, with the tissue specimen sandwiched therebetween, thus fixing the orientation of the tissue specimen.

 Additionally, the at least one holder is a surgical latex band.

 Additionally, the device may include a lining.

 Furthermore, the device may include a grid.

25 Additionally, the device is configured for applying a force of less than 500 gram on the tissue specimen.

 Furthermore, the device is configured for applying a force of between 20 and 200 gram on the tissue specimen.

30 Additionally, the device may further include at least one handle for holding the device.

 Furthermore, the device may be provided in a plurality of sizes.

 In accordance with one aspect of the present invention, there is thus provided a method for tissue transport and handling, comprising:

providing a device, which comprises:

a structure, configured for receiving and holding a tissue specimen, wherein the tissue specimen includes tissue positional references; and

device positional references, associated with the structure, for fixing the orientation of the tissue specimen, when held by the device; and

positioning the tissue specimen within the device, so as to reflect the tissue specimen positional references by the device positional references.

Additionally, the method includes maintaining the tissue specimen immobile, in the device.

Unless otherwise defined, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. Although methods and materials similar or equivalent to those described herein can be used in the practice or testing of the present invention, suitable methods and materials are described below. In case of conflict, the patent specification, including definitions, will control. In addition, the materials, methods, and examples are illustrative only and not intended to be limiting.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is herein described, by way of example only, with reference to the accompanying drawings. With specific reference now to the drawings in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of the preferred embodiments of the present invention only, and are presented in the cause of providing what is believed to be the most useful and readily understood description of the principles and conceptual aspects of the invention. In this regard, no attempt is made to show structural details of the invention in more detail than is necessary for a fundamental understanding of the invention, the description taken with the drawings making apparent to those skilled in the art how the several forms of the invention may be embodied in practice.

In the drawings:

Figures 1A - 1B schematically illustrate a device for tissue transport and handling, in accordance with some embodiments of the present invention;

Figures 2A - 2B schematically illustrate a device for tissue transport and handling, when assembled, in accordance with some embodiments of the present invention;

Figures 3 - 4 schematically illustrate devices for tissue transport and handling, of different sizes, in accordance with some embodiments of the present invention;

Figures 5A - 5D schematically illustrate a method of assembling a device for tissue transport and handling, in accordance with some embodiments of the present invention;

Figure 6 schematically illustrates a color-coded device for tissue transport and handling, in accordance with some embodiments of the present invention;

Figure 7 schematically illustrates an elliptical device for tissue transport and handling, in accordance with some embodiments of the present invention;

Figure 8 schematically illustrates a device for tissue transport and handling, having an inner grid, in accordance with some embodiments of the present invention;

Figure 9 schematically illustrates a device for tissue transport and handling, having a thin lining, in accordance with some embodiments of the present invention;

Figure 10 schematically illustrates the device with graduations, in accordance with some embodiments of the present invention;

Figures 11A - 11C schematically illustrate the device, formed as an outline of a box, in accordance with some embodiments of the present invention;

Figures 12A - 12C schematically illustrate the device, formed as a resilient cage, in accordance with some embodiments of the present invention;

Figures 13A - 13B schematically illustrate the device, formed as a sac-like mesh, in accordance with some embodiments of the present invention; and

Figures 14A - 14B schematically illustrate the device, formed as a resilient stocking-like device, in accordance with some embodiments of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention relates to a device and method for tissue transport and handling, while maintaining the in-vivo tissue orientation. The device includes a structure, configured for receiving and holding a tissue specimen, wherein the tissue specimen includes tissue positional references; and device positional references,

associated with the structure, for fixing the orientation of the tissue specimen, when held by the device, so as to reflect the tissue specimen positional references.

The principles and operation of the device for tissue transport and handling, according to embodiments of the present invention, may be better understood with
5 reference to the drawings and accompanying descriptions.

Before explaining at least one embodiment of the invention in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of the components set forth in the following description or illustrated in the drawings. The invention is capable of other
10 embodiments or of being practiced or carried out in various ways. Also, it is to be understood that the phraseology and terminology employed herein is for the purpose of description and should not be regarded as limiting.

Referring now to the drawings, Figures 1A - 2B schematically illustrate a device 10 for tissue handling, in accordance with some embodiments of the present
15 invention. Figures 1A and 1B illustrate the device 10 prior to deployment and Figures 2A and 2B illustrate the device 10 when holding a tissue specimen 20.

The device 10 includes a structure 10C, configured for receiving and holding a tissue specimen 20. The tissue specimen 20 has a specific positional reference with respect to the body from which it was taken, or is being taken, and the device 10 is
20 designed to maintain the tissue positional reference, by providing a rigid frame of reference for it.

The device 10 may be used after the tissue specimen 20 has been removed from the body, or while the tissue specimen 20 is being removed.

In accordance with some embodiments, the tissue positional references may be
25 marked on the tissue, for example, as a long suture 16A on a tissue lateral side, and as a short suture 17A on a tissue superior side. Alternatively, the tissue positional references are known but not marked.

Additionally, the structure 10C includes device positional references 15, for example, as a built-in design 15, for fixing the orientation of the tissue specimen 20, when held by the device 10, so as to reflect the positional references of the tissue
30 specimen 20.

For example, the structure 10C may be formed of first and second frames 10A and 10B, designed to be superimposed and receive and hold the tissue specimen 20

therebetween. Additionally, the structure 10C may include holders 30, for holding the first and second frames 10A and 10B together, with the tissue specimen 20 sandwiched therebetween, thus fixing the orientation of the tissue specimen 20.

The positional references 15 may define a device lateral side 16, a device superior side 17, and a device top face 18. Alternatively, the positional references 15 may provide information from which the device lateral side 16, superior side 17, and top face 18 may be inferred, for example, by marking corners rather than sides.

As seen in Figures 2A showing a superior view of the assembled device 10, the device 10 includes holders 30, for holding the first and second frames 10A and 10B together, when superimposed. A removed tissue specimen 20 is sandwiched therebetween.

As seen in Figures 2B, showing a top view of the assembled device 10, the removed tissue specimen 20 is arranged within the device 10 so that a tissue lateral side 26, a tissue superior side 27, and a tissue top face 28 match the device lateral side 16, the device superior side 17, and the device top face 18, as indicated by the design 15.

The design 15 may include suture holes 19, for tying a long suture 16C on the device lateral side 16 and a short suture 17C on the device superior side 17. In Figures 2A and 2B, these are seen together with the long suture 16A on the tissue lateral side and the short suture 17A on the tissue superior side. It will be appreciated that the tissue sutures 16A and 17A need not be used.

Alternatively, the design 15 may be any one of a mark, writing, a color code, a protrusion, or a notch, on the lateral side 16, the superior side 17, and the top face 18 of the device 10. Additionally or alternatively, any other manner of unequivocally defining the lateral side 16, the superior side 17, and the top face 18 of the device 10 may be employed.

Preferably, a cross-sectional area of the frames 10A and 10B is somewhat smaller than a cross sectional area of a face 25 of the removed tissue specimen 20. Thus, the removed tissue specimen 20 rests on the structure of the frames 10A and 10B.

Preferably, the frames 10A and 10B are rectangular in shape, having a width W, which is about 75% of a length L. For example, the length L may be about 60 mm and the width W may be about 45 mm. A frame width d, may be for example, about 2

mm. A frame thickness t , shown in Figures 5A and 5B, hereinbelow, may be, for example, between about 0.5 mm and about 1 mm. It will be appreciated that other dimensions and other proportions are similarly possible. For example, the length L may be between about 10 mm and about 100 mm and the width W may be, between
5 about 7.5 mm and about 75 mm. Alternatively, other dimensions and other proportions, which may be larger or smaller, may be used. It will be appreciated that other shapes, for example, ellipses, may similarly be possible.

Preferably, the structure 10C is substantially transparent to x-ray and (or) gamma imaging. Additionally or alternatively, the structure 10C is substantially
10 transparent to MRI. Thus, x-ray imaging, gamma imaging, and (or) MRI may be performed on the removed tissue specimen 20, when within the device 10.

Preferably, the frames 10A and 10B are rigid, to support the removed tissue specimen 20, but somewhat resilient.

Preferably, the frames 10A and 10B include handles 22, for example, corner
15 handles, for holding the tissue sample, when arranged within the frames. The corner handles may extend out a distance h of about 10 – 15% the length of the length L , arranged for example, at an angle δ , for example, 60 degrees. It will be appreciated that other handles, of other shapes, may also be used.

The holders 30 may be surgical latex bands. Alternatively, ordinary rubber
20 bands, ties, strings, clamps or other means of fastening the frames 10A and 10B together may be used. Notches 24 may be provided to keep the holders 30 in place.

An important consideration in the selection of the holders 30 is that they will be suitable for different widths of the removed tissue specimen 20, without exerting too much pressure on the removed tissue specimens 20. For example, when using
25 surgical latex band, a force of between 20 and 200 gram may be generated on the removed tissue specimen 20. Preferably, the holders 30 will generate a force on the removed tissue specimen 20, which is no greater than 500 gm.

Referring further to the drawings, Figures 3 and 4 schematically illustrate a system of the devices 10 of varying sizes, in accordance with some embodiments of
30 the present invention. For example, the device 10 of Figure 3 has a length $L1$ and a width $W1$, and the device 10 of Figure 4 has a length $L2$ and a width $W2$. Each of the devices 10 is used for a different size of the removed tissue specimen 20. Thus, a

plurality of devices 10 may be provided, in increasing size increments of about 10 % or 20%. It will be appreciated that other size increments may be employed.

Alternatively, expansible frames 10A and 10B may be provided, for example, with telescoping sides.

5 Referring further to the drawings, Figures 5A – 5D schematically illustrate the method of utilizing the device 10, in accordance with some embodiments of the present invention.

As seen in Figures 5A and 5B, the frames 10A and 10B are provided with the design 15 for marking the lateral side 16, the superior side 17, and the top face 18 of
10 the device 10.

As seen in Figure 5C, the tissue specimen 20, having a cross section of the face 25, which is somewhat larger than the cross-section of the frames 10A and 10B, is placed on the first frame 10A. The placement is such that the tissue lateral side 26 is at the device lateral side 16, the tissue superior side 27 is at the device superior side
15 17, and the tissue top side 28 is facing up.

As seen in Figure 5D, the second frame 10B is placed on the removed tissue specimen 20, and fastened with the holders 30.

Referring further to the drawings, Figure 6 schematically illustrates the device 10, wherein the design 15 of the device positional references is a color code, in
20 accordance with some embodiments of the present invention. For example, 15A may be orange, 15B may be green, representing the lateral side, 15C may be brown, representing the superior side, 15D may be blue, representing the bottom face, and 15E may be purple, representing the top face. A minimal color combination for defining the device's lateral and superior sides and the device's top face may be used.
25 However, more colors may be used, where desired.

Referring further to the drawings, Figure 7 schematically illustrates the device 10, wherein the frames 10A and 10B and the handle 22 are elliptical, in accordance with some embodiments of the present invention. It will be appreciated that many other geometrical forms may be used, and are within the scope of the present
30 invention.

Referring further to the drawings, Figure 8 schematically illustrates the device 10, having an inner grid 32, within the frames 10A and 10B, in accordance with some embodiments of the present invention. The grid 32 may be used for very small

10

removed tissue specimens 20, for example, less than a cubic centimeter. The grid 32 may be substantially transparent to x-ray and gamma ray. Thus, the removed tissue specimens 20 may undergo these examinations while in the device 10. Additionally or alternatively, the grid 32 is substantially transparent to MRI.

5 Referring further to the drawings, Figure 9 schematically illustrates the device 10, having a thin lining 34, for example of plastic or nylon, in accordance with some embodiments of the present invention. The thin lining 34 may also be used for very small removed tissue specimens 20. Preferably, the thin lining is substantially transparent to x-ray and (or) gamma ray, so that the removed tissue specimens 20 may
10 undergo these examinations while in the device 10. Additionally or alternatively, the thin lining is substantially transparent to MRI.

Referring further to the drawings, Figure 10 schematically illustrates the device 10, used as a reference coordinate system, in accordance with some embodiments of the present invention. Any one of the frame 10A or 10B or both can be used as a
15 reference coordinate system, for example, of x;y coordinates, for specifying locations on the removed tissue specimen 20. Both coarse and fine graduations may be employed.

Referring further to the drawings, Figures 11A – 11C schematically illustrate the device 10, formed as an outline of a box, in accordance with some embodiments of
20 the present invention. Accordingly, the structure 10C is formed of an outline of a box body 10A and an outline of a box lid 10B. A Color code may be employed. Additionally or alternatively, other positional references, such as 16 and 17 for defining the devices lateral and superior sides, may be used. The top face is inherently defined by the outline of the box lid 10B.

25 As seen in Figure 11C, the tissue specimen 20 may be placed in the box body 10A and covered by the box lid 10B. The holders 30 may be used to keep the box body 10A and the box lid 10B together.

The present embodiment is useful for placing therein tissue specimen 20 even prior to complete removal. The tissue specimen 20 may be first placed in the outline
30 of the box body 10A and then completely removed. After removal, the outline of the box lid 10B may be placed over the tissue specimen 20.

Referring further to the drawings, Figures 12A – 12C schematically illustrate the device 10, formed as a color-coded resilient cage, in accordance with some embodiments of the present invention.

Figure 12A illustrates the structure 10C, as a resilient cage, in its natural state.

5 Figure 12B illustrates the structure 10C, as the resilient cage, when stretched and opened, to receive the tissue specimen 20.

Figure 12C illustrates the structure 10C, as the resilient cage, holding the tissue specimen within.

10 The four colors 15A – 15D define the lateral and superior orientations. At least one additional color, 15E, for example, purple, defines the top face.

Alternatively, positional references other than a color code may be employed.

The present embodiment may be placed on the tissue specimen 20 prior to its complete removal.

15 Referring further to the drawings, Figures 13A and 13B schematically illustrate the device 10, formed as a color-coded, sac-like mesh 10C, in accordance with some embodiments of the present invention.

The color-coded, sack-like mesh 10C includes a draw string 40, for forming a relatively tight fit over the tissue specimen 20. The draw string 40 is operative also to mark the top face. Additionally, the draw string 40 may form a loop, for carrying.

20 The present embodiment is different from the previous embodiments in being non-rigid. Therefore, the tissue specimen 20 may be examined from any direction, without being limited by the shape of the structure 10C, since it has no specific shape.

25 Additionally, the present embodiment may be placed on the tissue specimen 20 prior to its complete removal, and the draw string 40 may be drawn immediately with the removal.

Referring further to the drawings, Figures 14A – 14B schematically illustrate the device 10, formed as a color-coded, stretchable, stocking-like structure 10C, in accordance with some embodiments of the present invention.

30 The stretchable, stocking-like structure 10C may be stretched over the tissue specimen 20, to form a tight fit over it, while the color code maintains the tissue orientation. A stretchable orifice 42 allows the stocking-like structure 10C to receive the tissue specimen 20 and close over it, holding it within. A loop 44 may be used as a carrying handle.

Again, the present embodiment is non-rigid.

Additionally, the present embodiment may be placed on the tissue specimen 20 prior to its complete removal.

The advantages of the device 10, in accordance with the embodiments of the present invention, is that when placed within, the removed tissue specimen 20 may be handled, for example, carried, transported, maneuvered, rotated, examined by various techniques and otherwise manipulated, while its orientation remains fixed. In accordance with some embodiments, the device 10 is a rigid body. Alternatively, the device 10 maintains the orientation of the tissue even when not rigid, for example, as illustrated in Figures 13A and 13B.

Using the device 10, the six faces for the removed tissue specimen 20 may be defined and maintained, vis a vis the in-vivo orientation.

For example, the device 10 may allow easy handling of the removed tissue specimen 20 and clear approach to its faces 25 (Figure 2B) without changing its initial orientation,

Furthermore, the device 10 allows examination, such as x-ray imaging, gamma scanning, and (or) MRI when the tissue specimen 20 is within. Preferably, the structure 10C is essentially transparent to imaging by x-ray, gamma and (or) MR, so as not to interfere with the examination. For example, the structure 10C may be formed of a hydrocarbon polymer, so as to be transparent to x-ray and or gamma rays. Alternatively, the structure 10C may be formed of teflon or titanium, so as to be substantially transparent to MRI.

Additionally, different devices 10 may be provided for different tissue specimen sizes, so as to tailor fit to the required tissue specimen size. Additionally or alternatively, the device 10 may be stretchable or expandable.

It is expected that during the life of this patent many relevant devices for tissue transport and handling will be developed and the scope of the term device for tissue transport and handling is intended to include all such new technologies a priori.

As used herein the terms "about" and "substantially" refer to $\pm 20\%$.

It is appreciated that certain features of the invention, which are, for clarity, described in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the invention,

which are, for brevity, described in the context of a single embodiment, may also be provided separately or in any suitable subcombination.

Although the invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art. Accordingly, it is intended to embrace all
5 such alternatives, modifications and variations that fall within the spirit and broad scope of the appended claims.

All publications, patents and patent applications mentioned in this specification are herein incorporated in their entirety by reference into the specification, to the same
10 extent as if each individual publication, patent or patent application was specifically and individually indicated to be incorporated herein by reference. In addition, any citation or identification of any reference in this application shall not be construed as an admission that such reference is available as prior art to the present invention.

WHAT IS CLAIMED IS:

1. A device for tissue handling, comprising:
a structure, configured for receiving and holding a tissue specimen, wherein the tissue specimen includes tissue positional references; and
device positional references, associated with the structure, for fixing the orientation of the tissue specimen, when held by the device, so as to reflect the tissue specimen positional references.
2. The device of claim 1, configured to define tissue lateral and superior sides and a tissue top face.
3. The device of claim 1, wherein the device is substantially transparent to at least one imaging modality, selected from the group consisting of x-ray imaging gamma imaging, and MRI.
4. The device of claim 1, configured to receive the tissue specimen prior to its complete removal.
5. The device of claim 1, wherein the device positional references are built into the structure of the device.
6. The device of claim 1, wherein the device positional references are based on a color code.
7. The device of claim 1, wherein the device positional references are based on sutures of different lengths.
8. The device of claim 1, formed as a rigid body.
9. The device of claim 1, formed as a flexible body.

10. The device of claim 1, formed as a stretchable body.
11. The device of claim 1, formed as an expansible body.
12. The device of claim 1, formed as a sac-like mesh.
13. The device of claim 1, formed as a stretchable stocking.
14. The device of claim 1, formed as a resilient cage.
15. The device of claim 1, formed as a box outline, comprising:
a box outline body;
a box outline lid; and
at least one holder, for holding together the box outline body and lid.
16. The device of claim 1, wherein the structure comprises:
first and second frames, designed to be superimposed and receive and hold the tissue specimen therebetween; and
at least one holder, for holding the first and second frames together, with the tissue specimen sandwiched therebetween, thus fixing the orientation of the tissue specimen.
17. The device of claim 16 or 15, and wherein the at least one holder is a surgical latex band.
18. The device of claim 16 or 15, and further including a lining.
19. The device of claim 16 or 15, and further including a grid.
20. The device of claim 1, configured for applying a force of less than 500 gram on the tissue specimen.

21. The device of claim 1, configured for applying a force of between 20 and 200 gram on the tissue specimen.
22. The device of claim 1, and further including handles for holding the device.
23. The device of claim 1, provided in a plurality of sizes.
24. A method for tissue transport and handling, comprising:
providing a device, which comprises:
a structure, configured for receiving and holding a tissue specimen,
wherein the tissue specimen includes tissue positional references; and
device positional references, associated with the structure, for fixing the
orientation of the tissue specimen, when held by the device; and
positioning the tissue specimen within the device, so as to reflect the tissue
specimen positional references by the device positional references.
25. The method of claim 24, and further including maintaining the tissue
specimen immobile, in the device.
26. The method of claim 24, wherein the device is configured to define
tissue lateral and superior sides and a tissue top face.
27. The method of claim 24, wherein the device is substantially transparent
to at least one imaging modality, selected from the group consisting of x-ray imaging
gamma imaging, and MRI.
28. The method of claim 24, wherein the device is configured to receive the
tissue specimen prior to its complete removal.
29. The method of claim 24, wherein the device positional references are
built into the structure of the method.

30. The method of claim 24, wherein the device positional references are based on a color code.
31. The method of claim 24, wherein the device positional references are based on sutures of different lengths.
32. The method of claim 24, wherein the device is formed as a rigid body.
33. The method of claim 24, wherein the device is formed as a flexible body.
34. The method of claim 24, wherein the device is formed as a stretchable body.
35. The method of claim 24, wherein the device is formed as an expansible body.
36. The method of claim 24, wherein the device is formed as a sac-like mesh.
37. The method of claim 24, wherein the device is formed as a stretchable stocking.
38. The method of claim 24, wherein the device is formed as a resilient cage.
39. The method of claim 24, wherein the device is formed as a box outline, comprising:
a box outline body;
a box outline lid; and
at least one holder, for holding together the box outline body and lid.

40. The method of claim 24, wherein the structure comprises:
first and second frames, designed to be superimposed and receive and hold the tissue specimen therebetween; and
at least one holder, for holding the first and second frames together, with the tissue specimen sandwiched therebetween, thus fixing the orientation of the tissue specimen.
41. The method of claim 40 or 39, and wherein the at least one holder is a surgical latex band.
42. The method of claim 40 or 39, wherein the device further includes a lining.
43. The method of claim 40 or 39, wherein the device further includes a grid.
44. The method of claim 24, and further including applying a force of less than 500 gram on the tissue specimen.
45. The method of claim 24, and further including applying a force of between 20 and 200 gram on the tissue specimen.

1/14




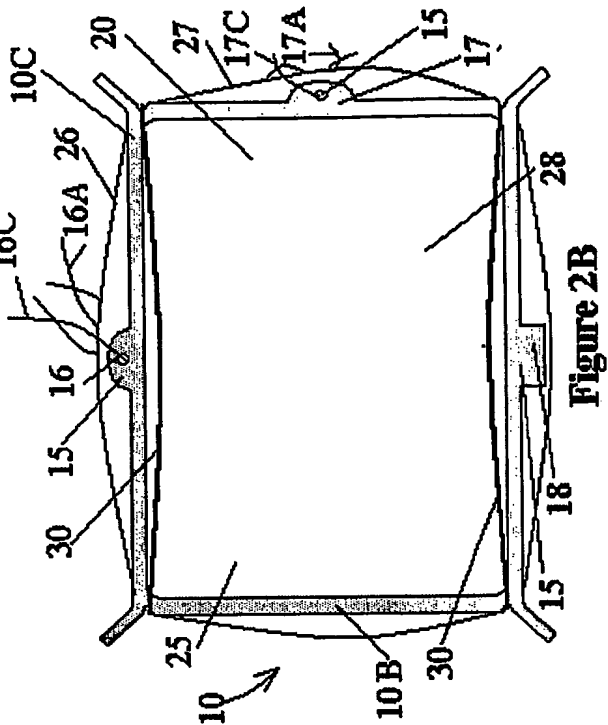


Figure 1A

Figure 2A

Figure 2B

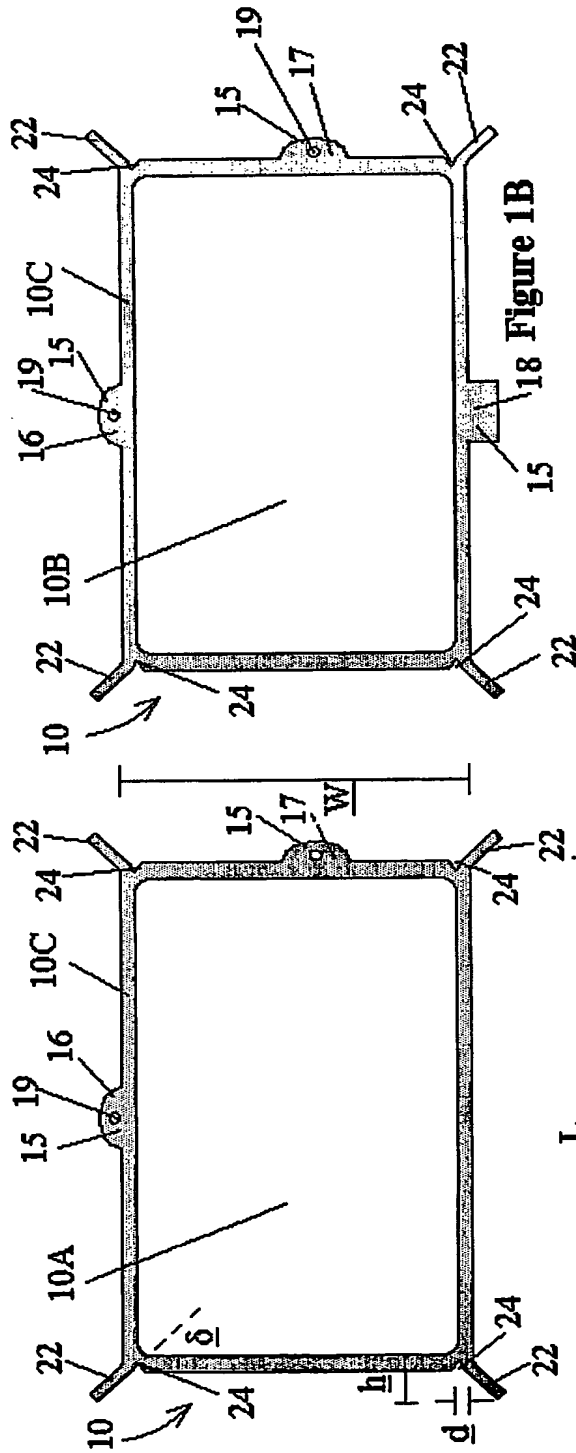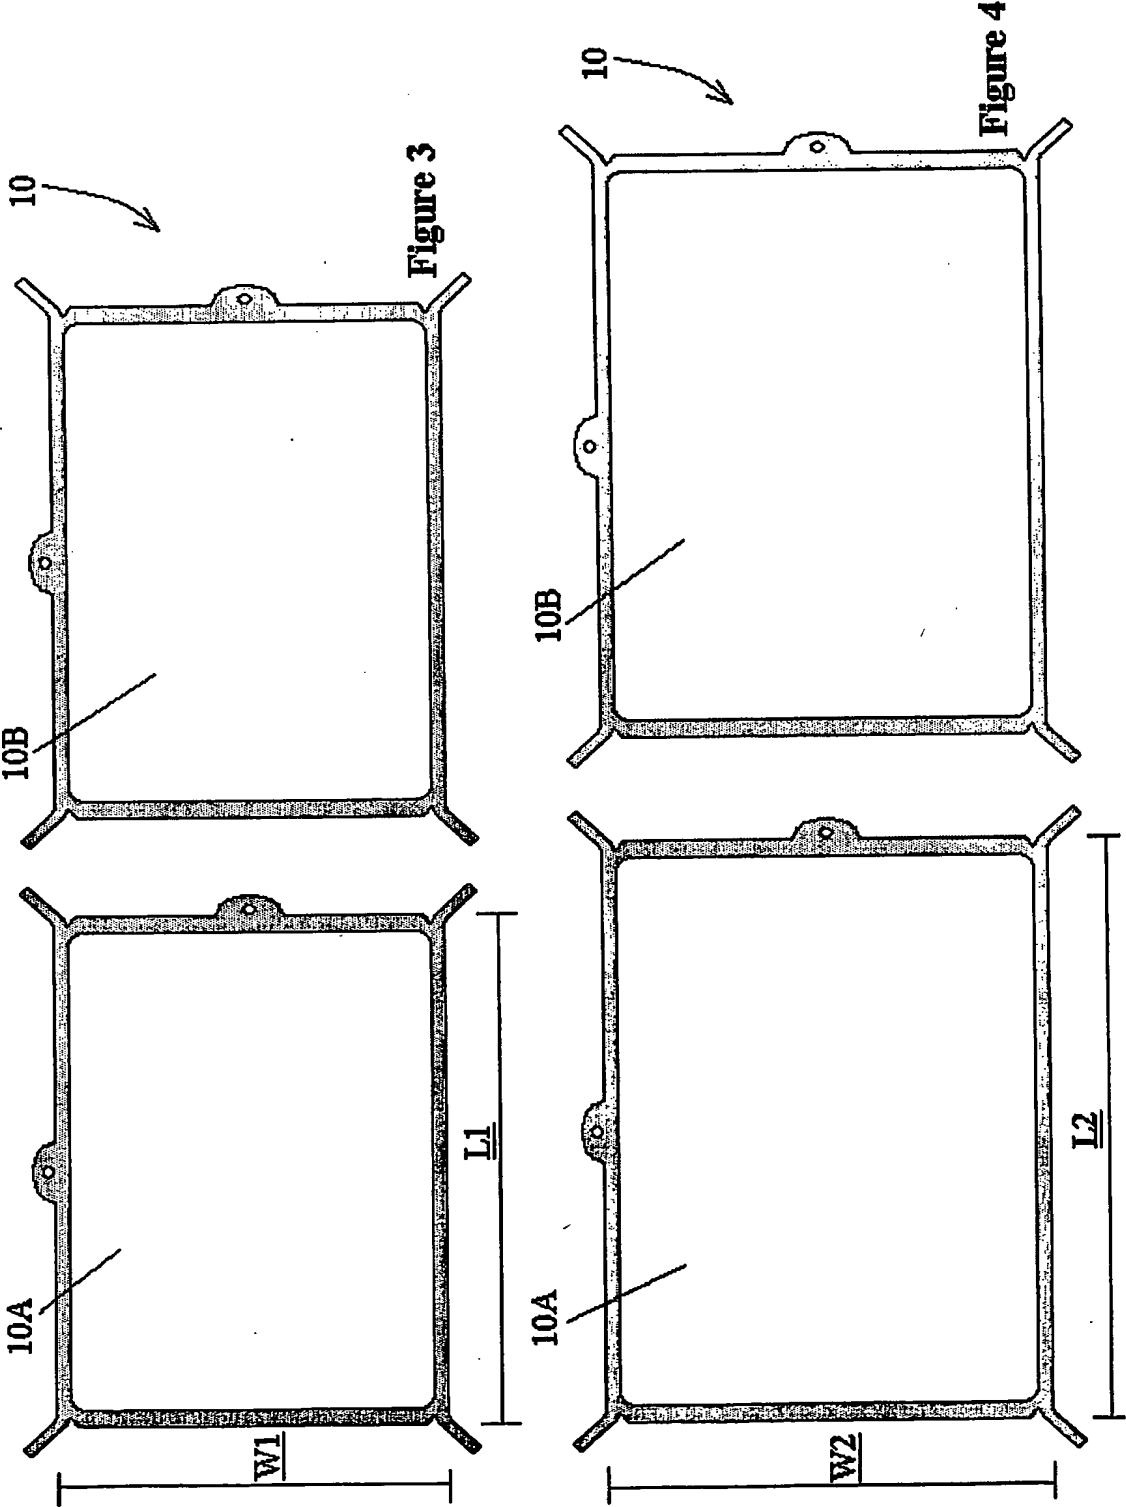

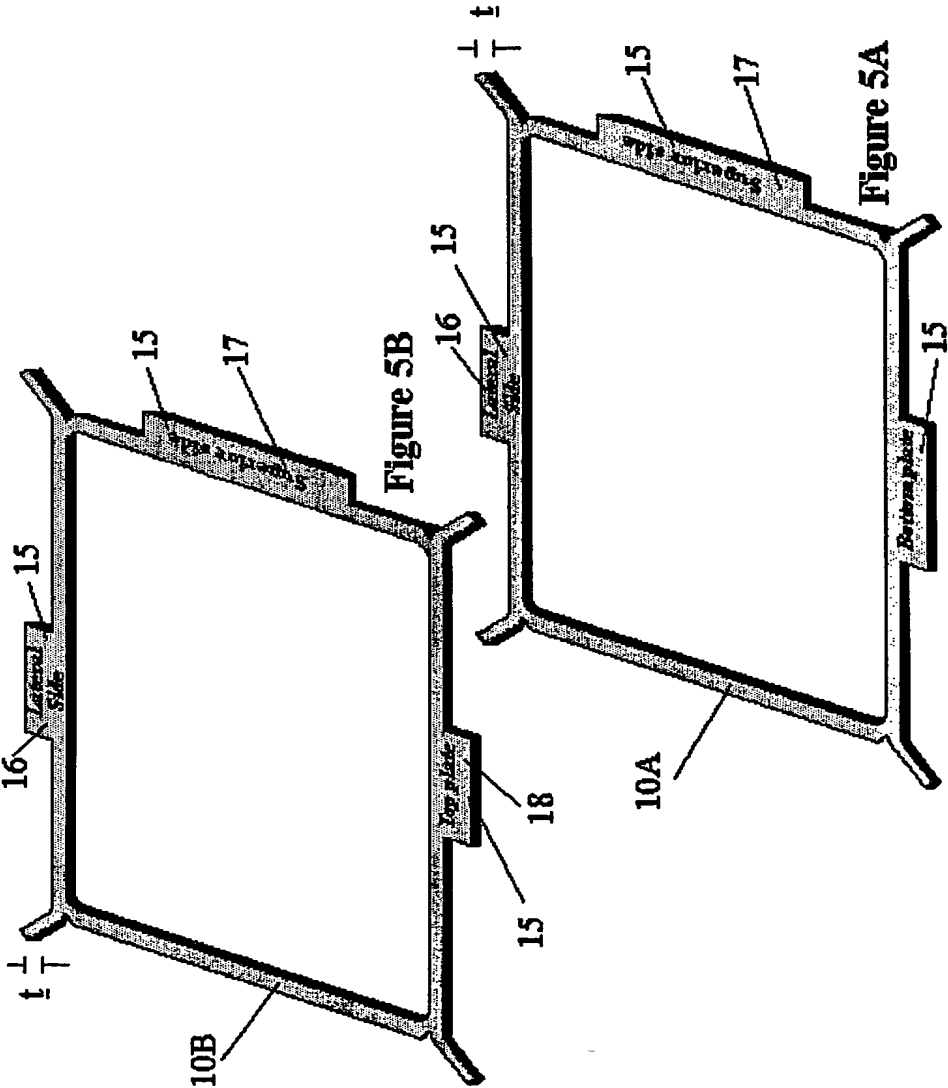

4/14

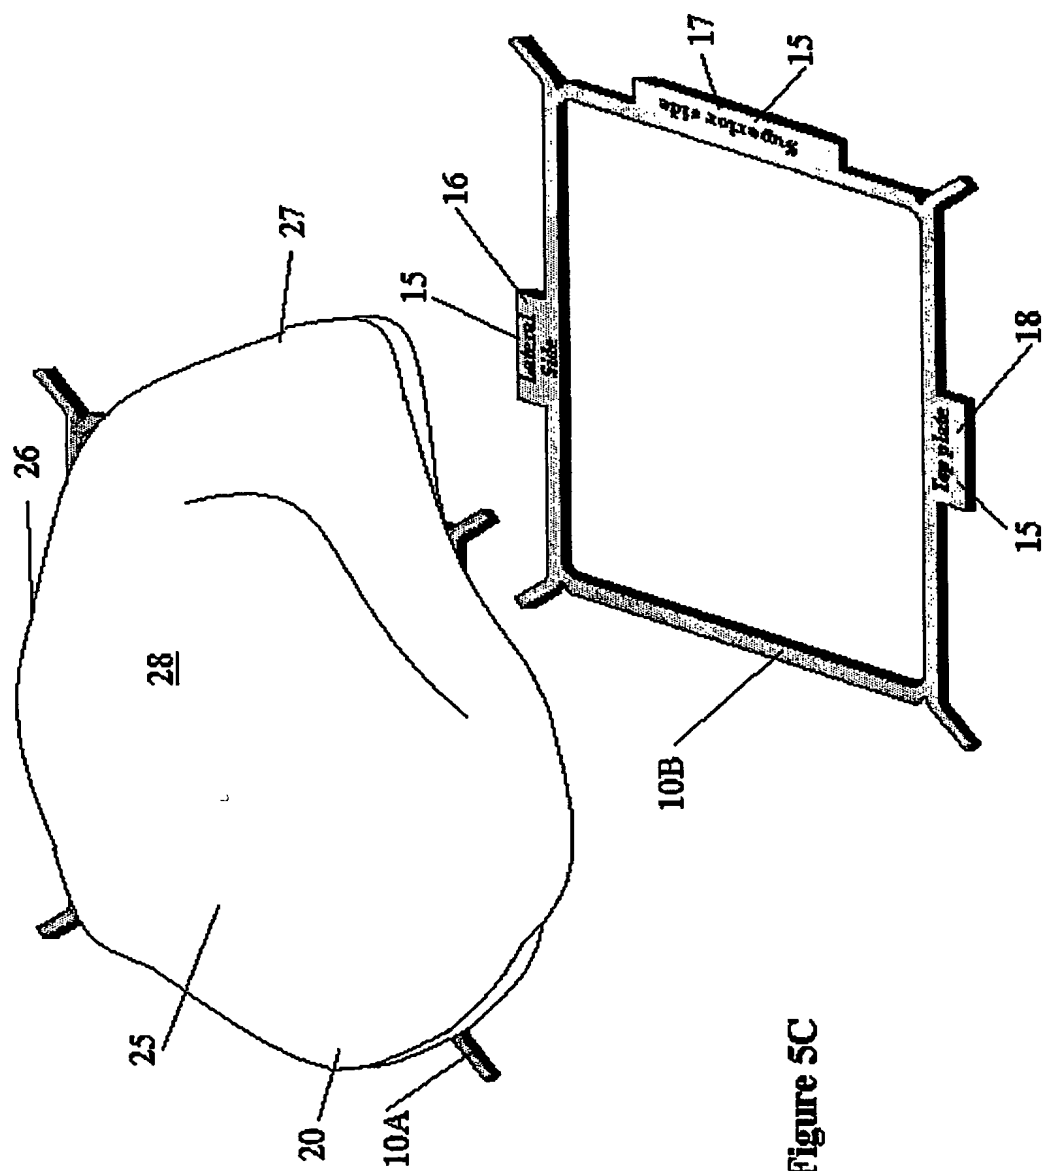


Figure 5C

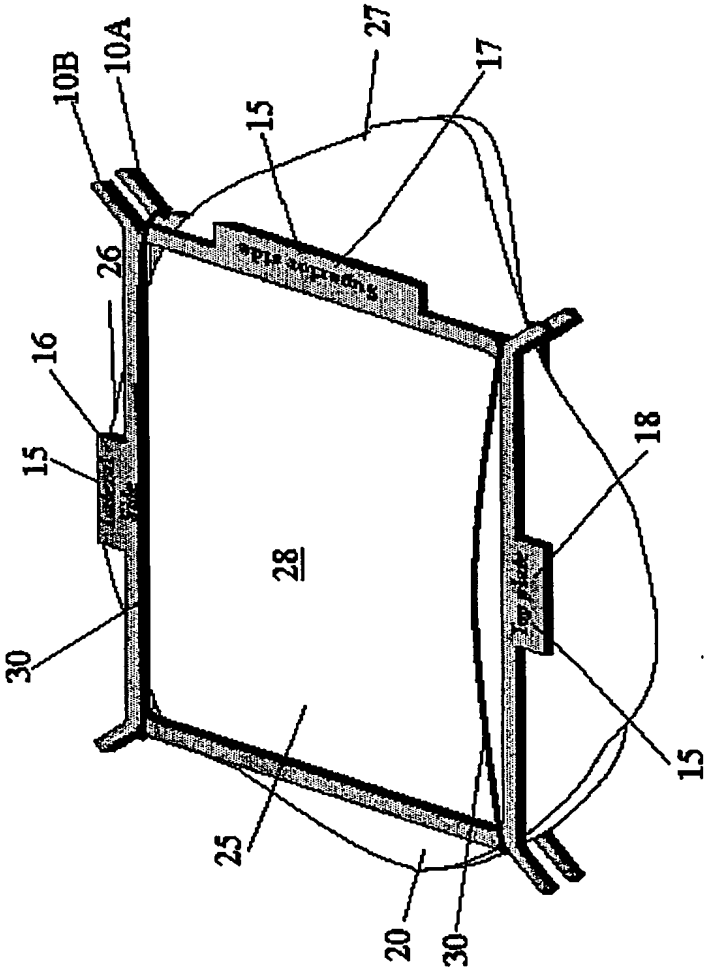


Figure 5D

6/14

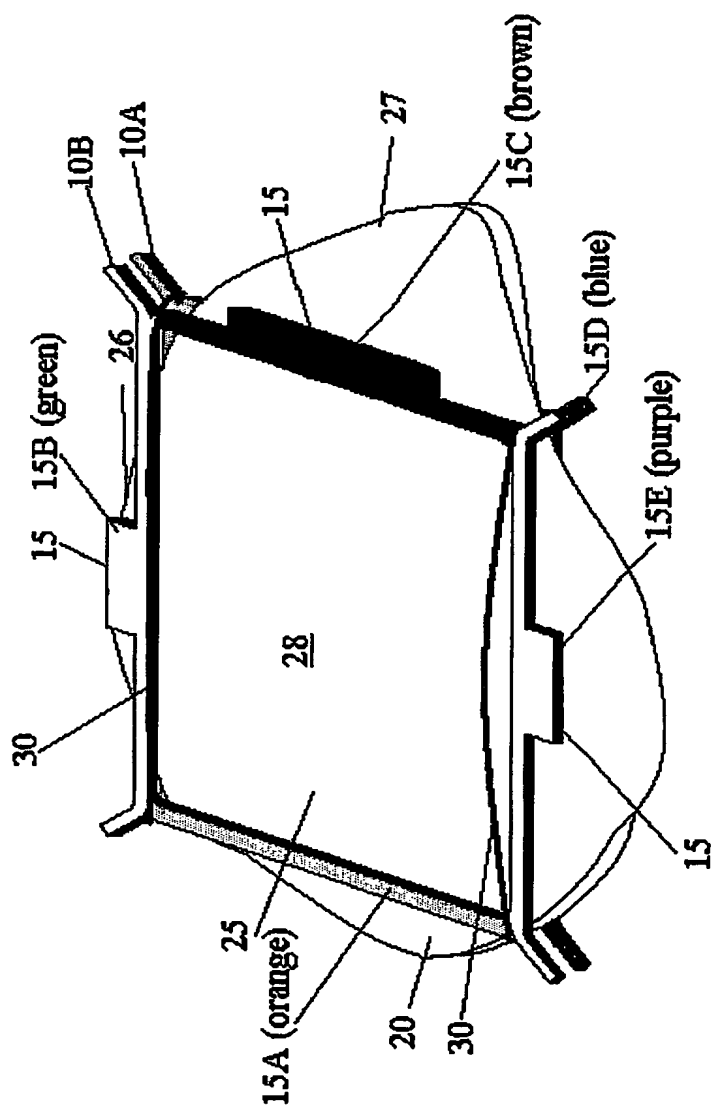


Figure 6

7/14

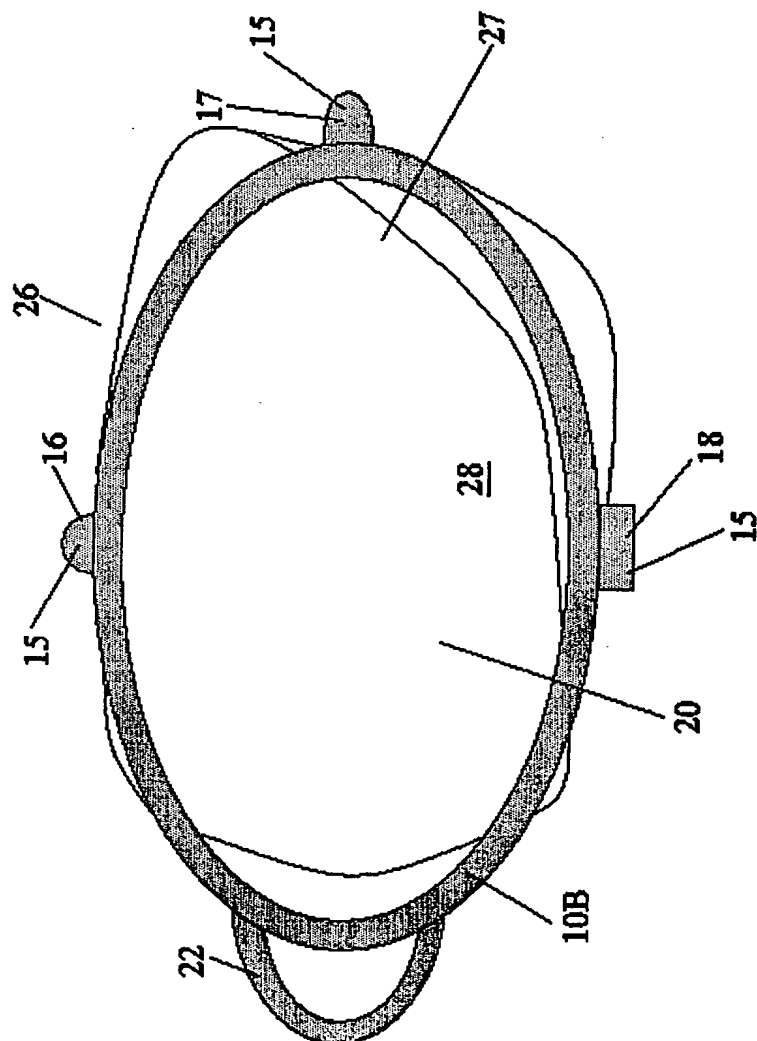


Figure 7

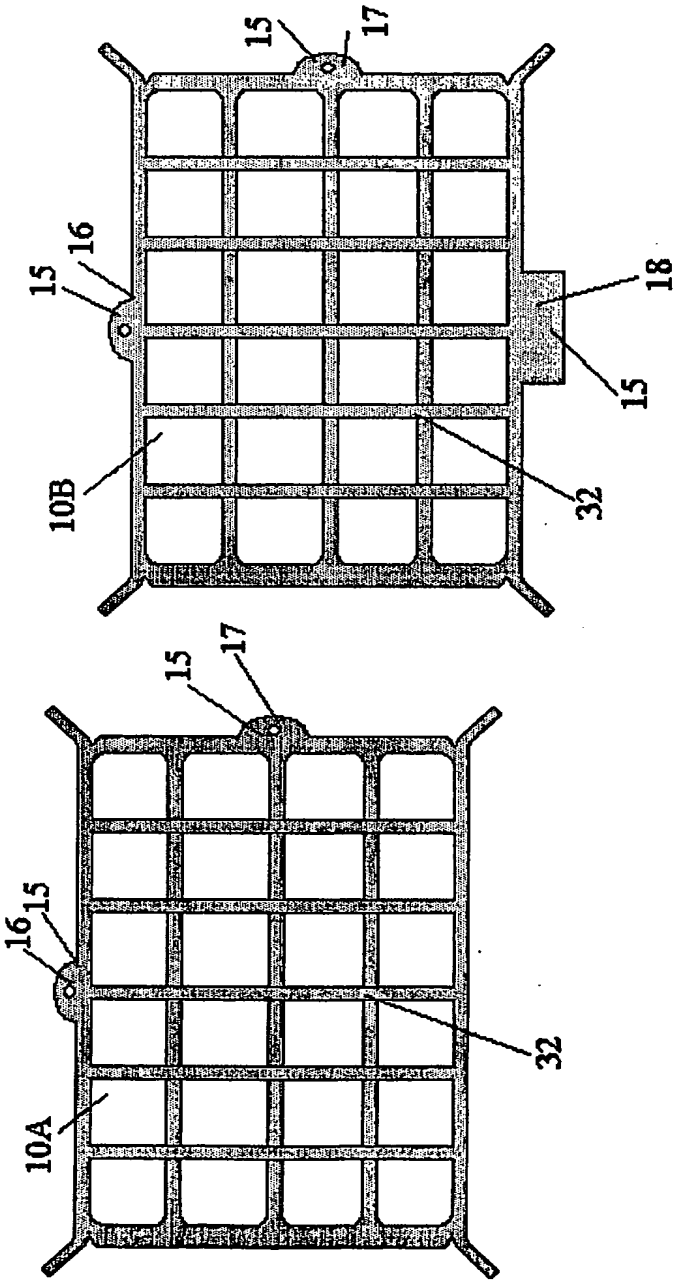


Figure 8

9/14

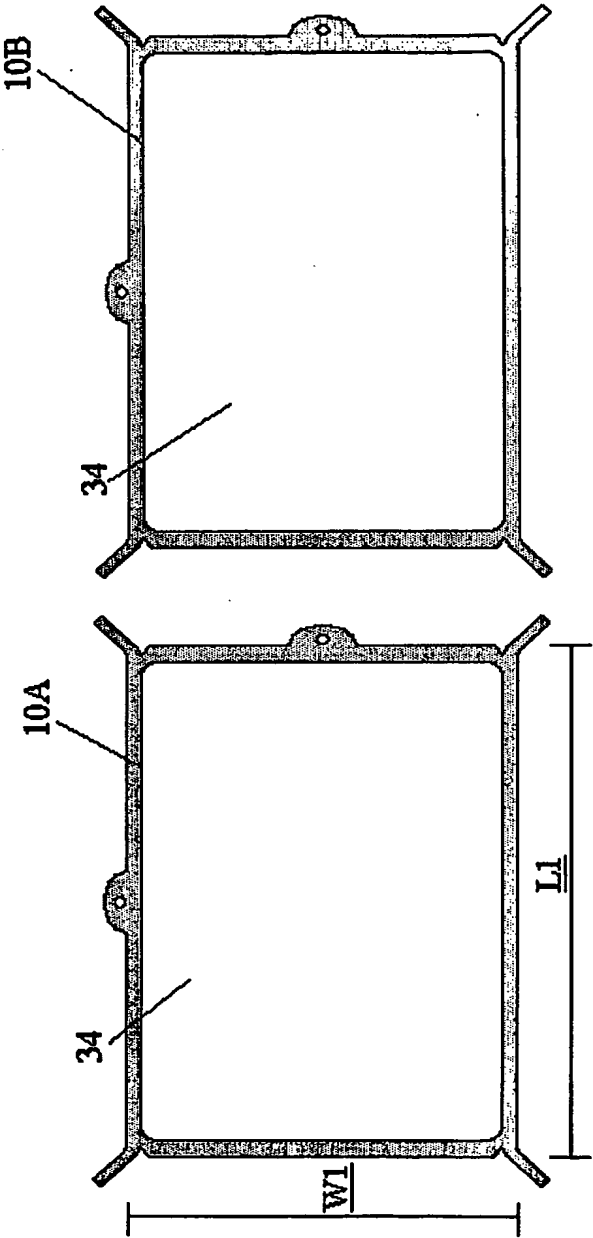


Figure 9


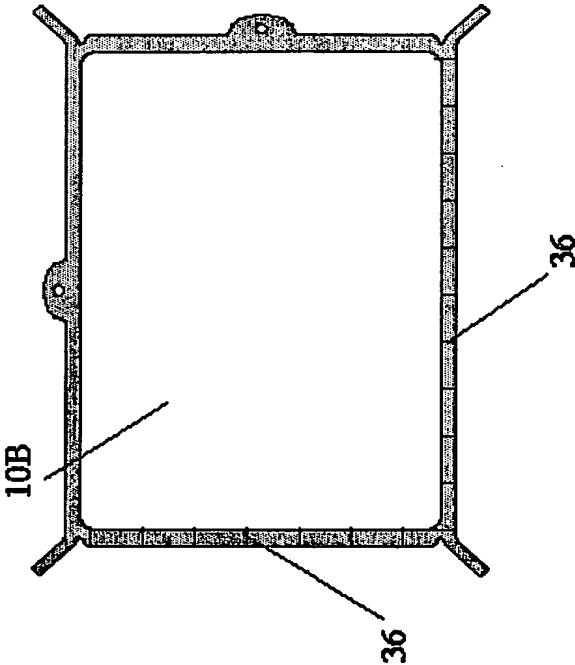


Figure 10

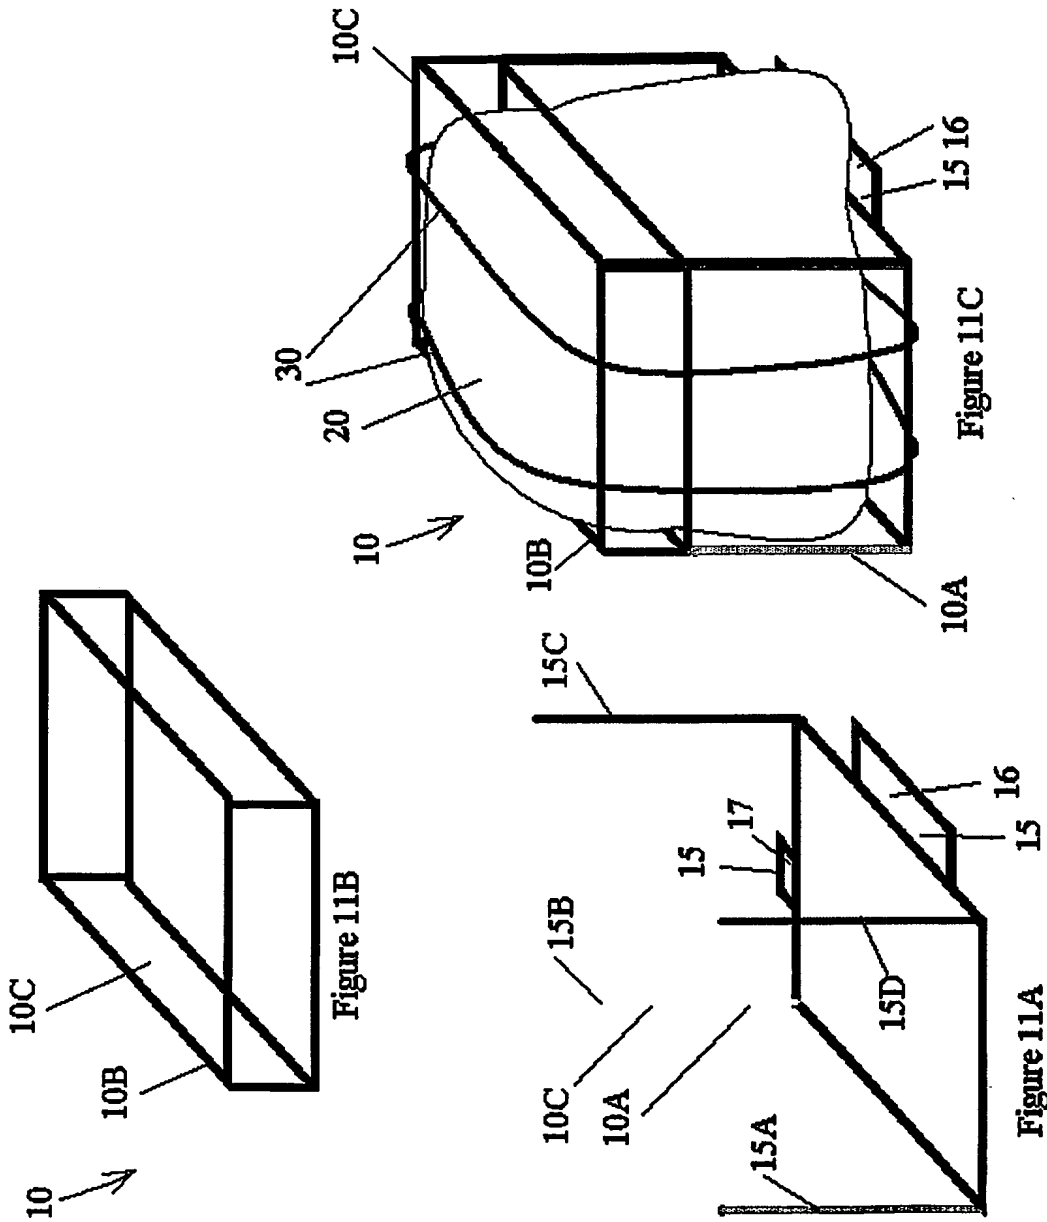

12/14

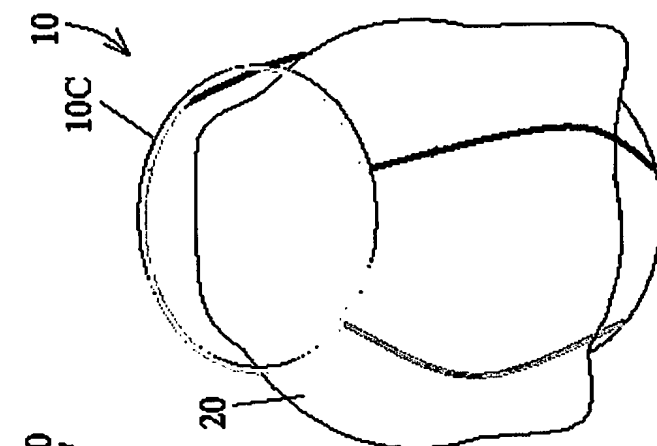


Figure 12C

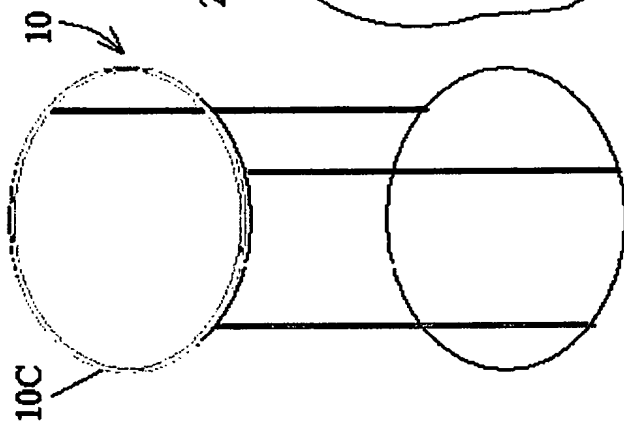


Figure 12B

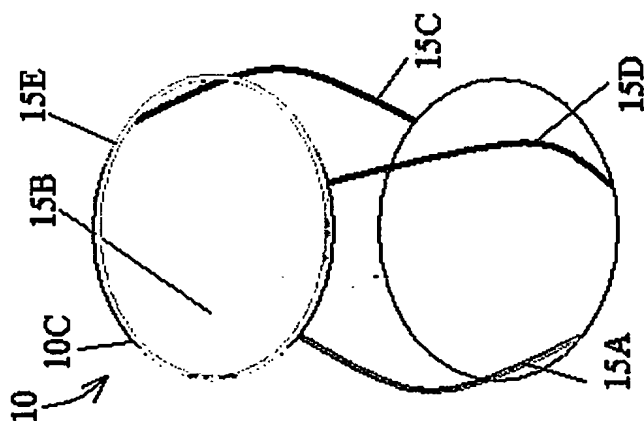
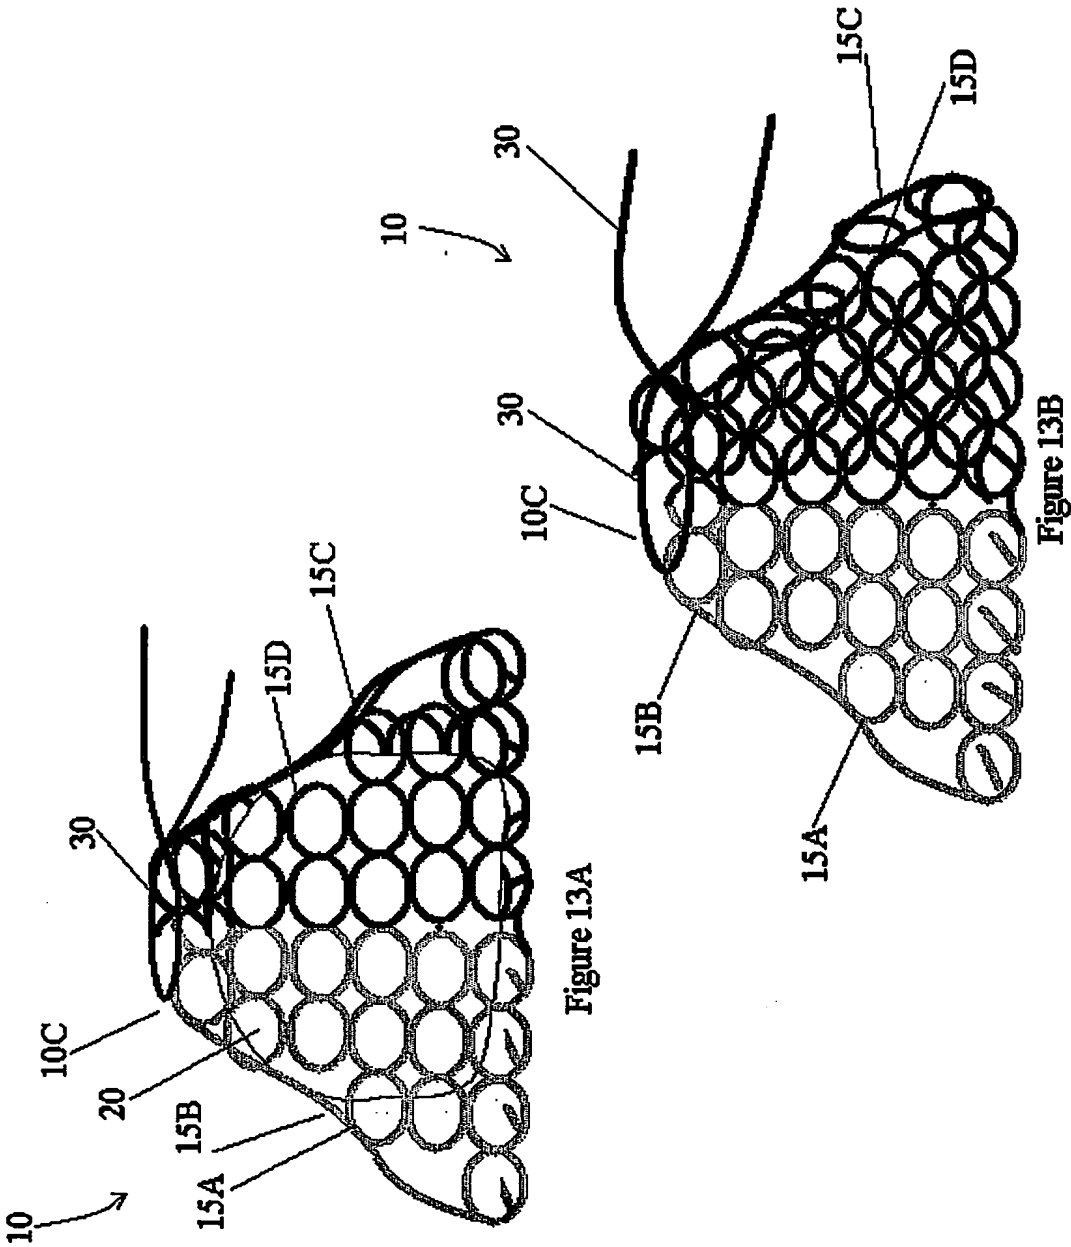


Figure 12A



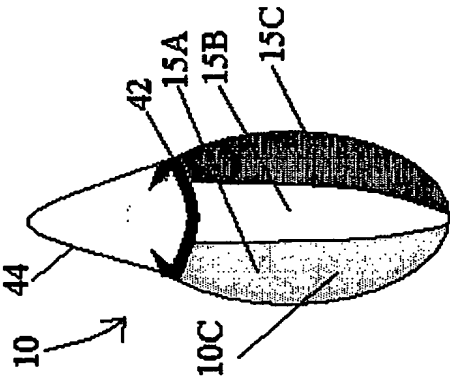


Figure 14B

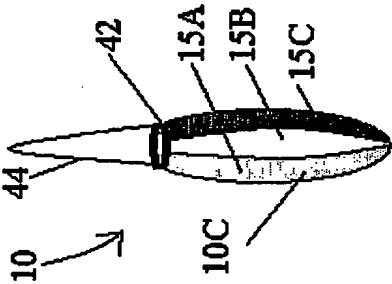


Figure 14A

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 September 2006 (08.09.2006)

PCT

(10) International Publication Number
WO 2006/092797 A3

(51) International Patent Classification:
A61B 19/00 (2006.01)

(21) International Application Number:
PCT/IL2006/000288

(22) International Filing Date: 2 March 2006 (02.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/657,410 2 March 2005 (02.03.2005) US

(71) Applicant (for all designated States except US): DUNE
MEDICAL DEVICES LTD. [IL/IL]; 20 Alon Hatavor
Street, Industry Park, 38900 Caesaria (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HASHIMSHONY,
Dan [IL/IL]; Simtat Hairit, 37808 Givat Ada (IL).
YARDEN, Orit [IL/IL]; 22 Rehavat-Ilan, 54056 Gi-
vat Shmuel (IL). AHARONOWITZ, Gal [IL/IL]; 7
Hakalanit Street, 44910 Moshav Gan Haim (IL). COHEN,
Gil [IL/IL]; 8 Davidson Street, 93706 Jerusalem (IL).
GELTNER, Iddo [IL/IL]; 4 El-Al Street, 46588 Herzlia
(IL).

(74) Agent: G.E. EHRLICH (1995) LTD.; 11 Menachem Be-
gin Street, 52 521 Ramat Gan (IL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,
LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI,
NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG,
SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(88) Date of publication of the international search report:
8 February 2007

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: DEVICE AND METHOD FOR TRANSPORTING AND HANDLING TISSUE

(57) Abstract: A device and method are provided for tissue handling, while maintaining the in-vivo tissue orientation. The device includes a structure, configured for receiving and holding a tissue specimen, wherein the tissue specimen includes tissue positional references; and device positional references, associated with the structure, for fixing the orientation of the tissue specimen, when held by the device, so as to reflect the tissue specimen positional references.



WO 2006/092797 A3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL06/00288

A. CLASSIFICATION OF SUBJECT MATTER

IPC: A61B 19/00(2006.01)

USPC: 422/101,102;604/403;436/174

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
U.S. : 422/101,102; 604/403; 436/174

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,609,827 (RUSSELL et al) 11 March 1997 (11.03.1997), abstract	1-45

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

02 October 2006 (02.10.2006)

Date of mailing of the international search report

02 NOV 2006

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

Facsimile No. (571) 273-3201

Authorized officer

Jill Warden

Telephone No. (571)272-1300